


ATLANTIS®

®

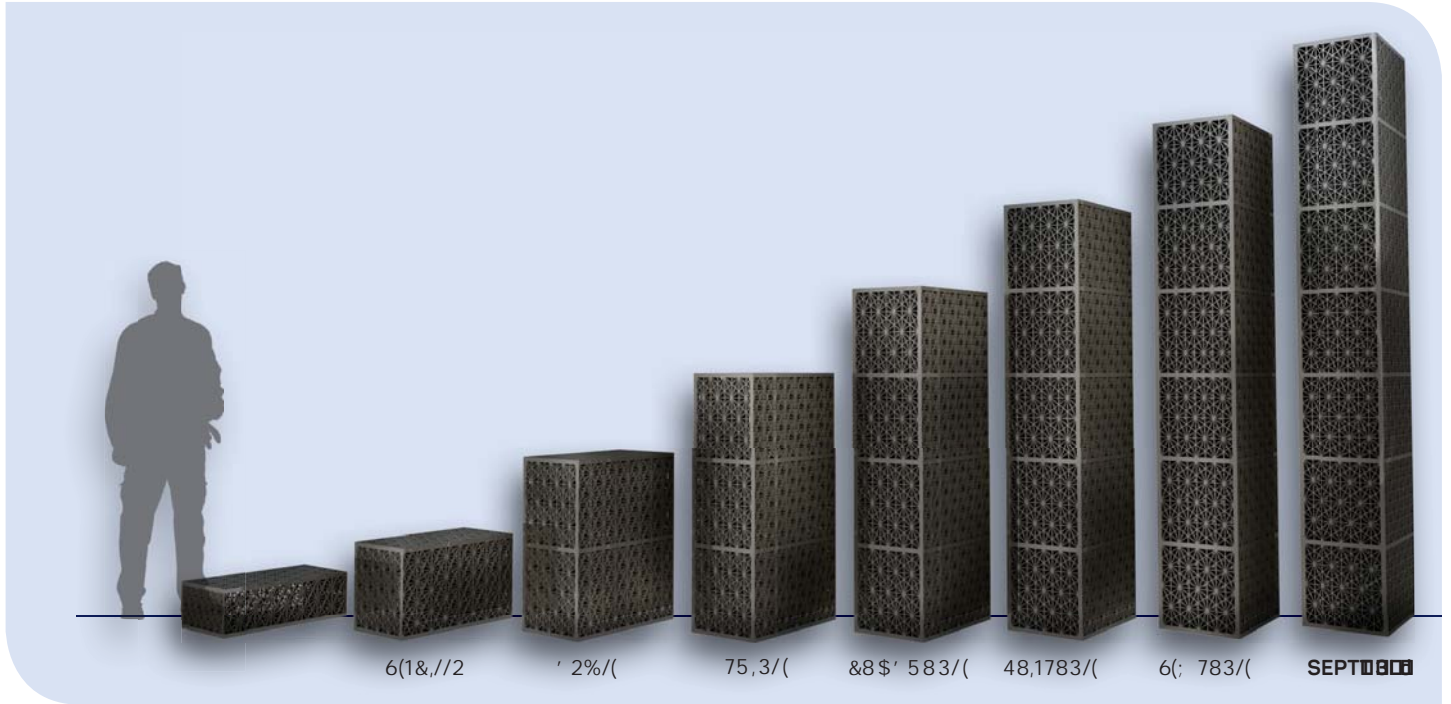

6(1&./1/2	' 2%/(75,3/(&8\$' 583/(48,1783/(6(; 783/(SEPTU800	
mm	450	880	1,310	1,740	2,170	3,030	
Inch	17.71	34.64	51.57	68.50	84.43	119.29	
Litros	126	246	366	486	607	847	
US Gal	33.28	65	96.69	128.39	160.35	223.75	
Litros	119.48	233.65	347.81	461.98	576.15	804.48	
US Gal	31.56	61.72	91.88	122.04	152.20	212.52	
Kg	7.28	13.46	19.64	25.82	32.00	44.36	
Lbs	16.05	29.67	43.30	56.92	70.55	97.80	
Modulo por m3 (35.31 Ft3)	7.95	4.06	2.73	2.03	1.65	1.24	
Caudal de drenaje (1% de gradiente)		11.5 L/Sec/m @ 1% gradient (3.038 US Gal/sec)					
Carga máxima recomendada		28 Ton/m2 (39.82 psi)					
Ratio de drenaje	70%						
Material	Poliéster de alta resistencia						
Color	Negro						
5HVLVWHQFLDXTXfiPLFD\ ELROJLFD	Especificaciones técnicas y condiciones de uso						
7HPSHUDWXUDGHUYEIR	-30°C to 120°C (-22 F° to 248 F°)						
(VSHUDQ] DGHYLDGHPDWHULDO	100 años de garantía						

Note: Las especificaciones técnicas y condiciones de uso están sujetas a cambios sin previo aviso. Consulte el manual de instalación para más detalles.